



ThermaRoll 77 & ThermaRoll 55

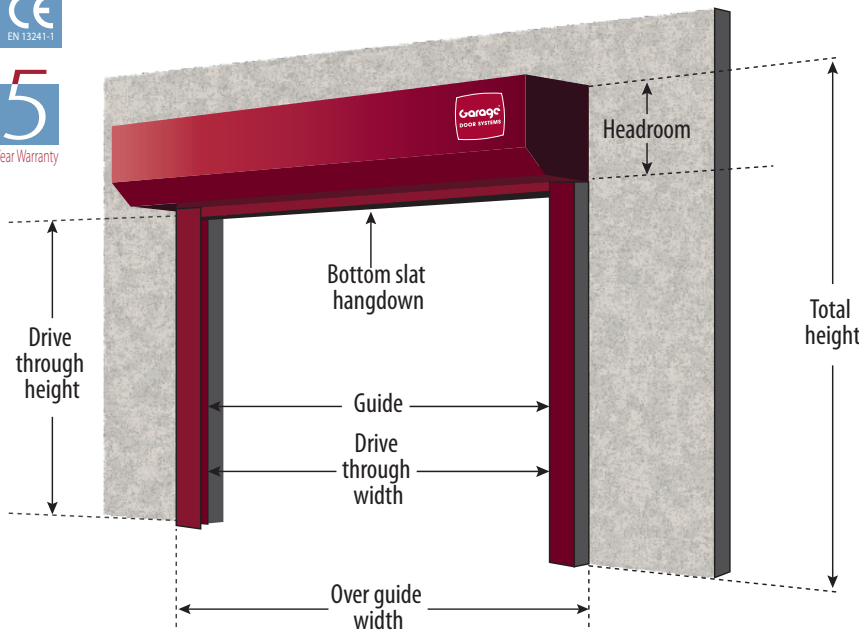

Ordering Height = Guide Height
Ordering Width = Over Guide Width
Total Height = Guide Height + Headroom

Headroom & drive through height



ThermaRoll 77

HR = 300mm for guide heights < 2600mm high

HR = 360mm for guide heights > 2600mm high

Available drive through height = guide height - 77mm


ThermaRoll 55

HR = 205mm for all guide heights

Available drive through height = guide height - 55mm


Guides & drive through width

70mm Guides: ThermaRoll 77 up to 3000mm wide x 2700mm high




Available drive through width = Over guide width - 140mm

100mm Guides: ThermaRoll Doors all widths



Available drive through width = Over guide width - 200mm

66mm Guides: ThermaRoll 55 Doors




Available drive through width = Over guide width - 132mm

Installation options


INTERNAL FACE FIXING

The door is fitted to the back of the opening without the need for a timber frame. This allows for the maximum drive through width and height depending on available headroom.




EXTERIOR FACE FIXING

In some cases it may be necessary to fit the door to the outside of the garage. The ThermaRoll 55 with full box system makes this possible.



REVEAL FIXING

This option allows the door to be fitted between the reveals maximising available space within the garage or for garages where there is no available side room. If the roll is going to be visible from the outside the 90° back box must be installed.



Floor rebate

To help assist water draining away effectively from the door and prevent water ingress you must have a rebate. If your floor is not rebated and not sloping away from the door you will be susceptible to water ingress as water will not be able to drain away effectively.

- **10mm minimum high rebate behind the door threshold or where your door seal meets a level floor.**
- **It must run 130mm past the opening to accommodate the guides**
- **It must run 130mm into the opening to accommodate the guides.**

