




DURATHERM INSULATED SECTIONAL GARAGE DOORS

Measurements - viewed from inside the garage

Typical minimum headroom needed **8** 145mm with automation
9

For an 8'0" (2438mm) wide x 7'0" (2134mm) high door

Typical minimum sideroom needed **6** 90mm
7

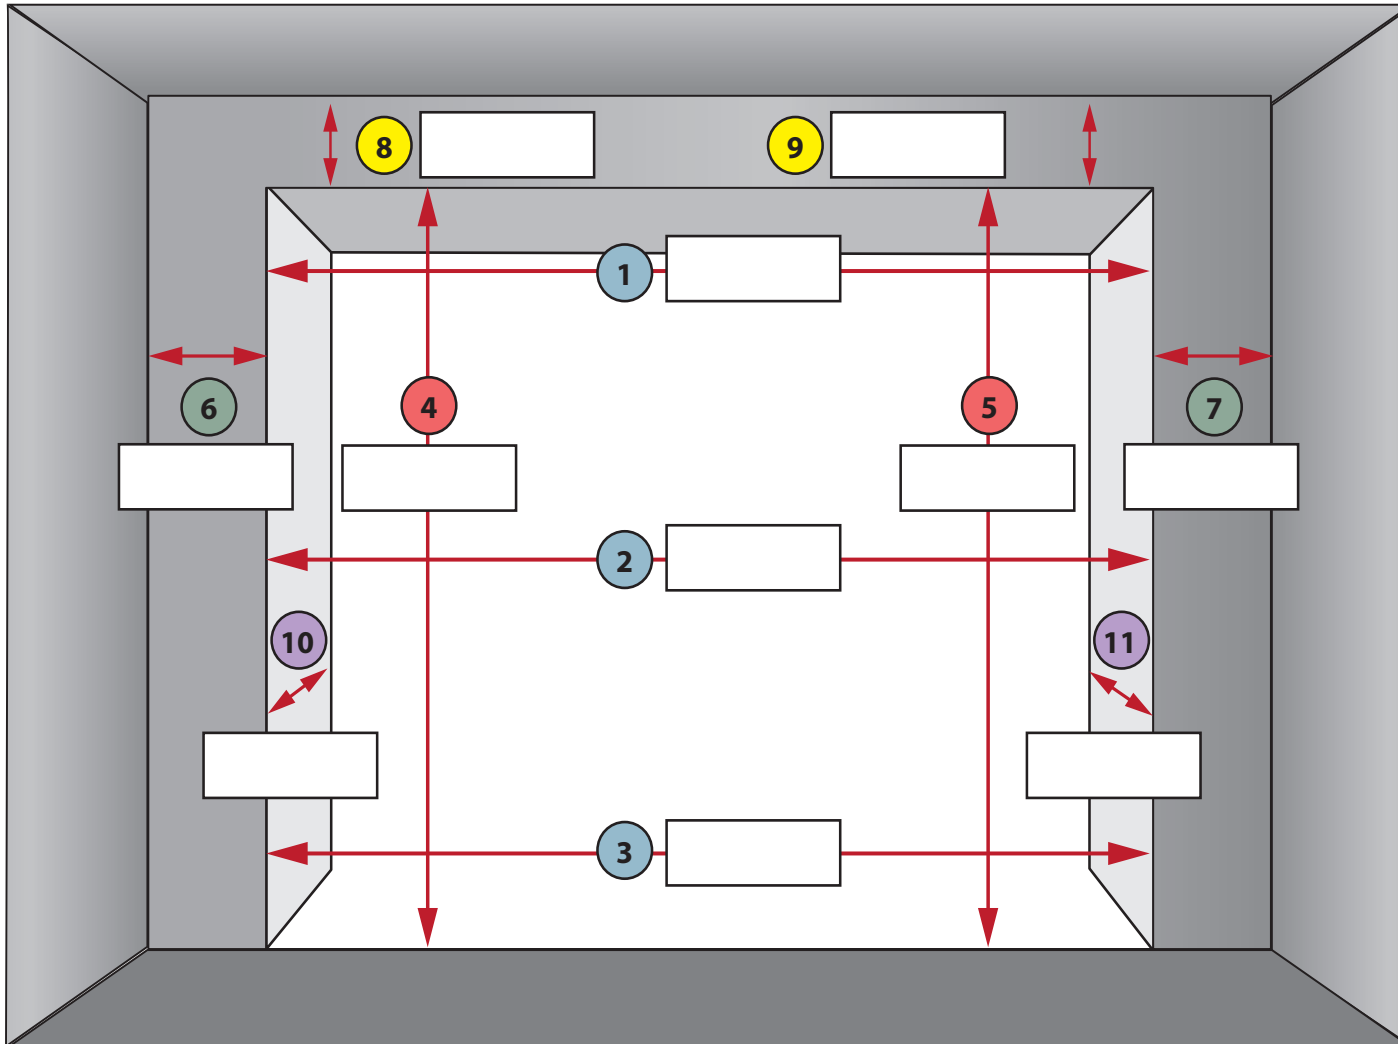

- ① Width brick to brick top
- ② Width brick to brick middle
- ③ Width brick to brick bottom
- ④ Height lintel to floor left
- ⑤ Height lintel to floor right
- ⑥ Side room left
- ⑦ Side room right
- ⑧ Headroom left
- ⑨ Headroom right
- ⑩ Reveal depth left
- ⑪ Reveal depth right